


## INSTALLATION:

Rigid assembled mat usually requires screw fixing. Floor surfaces must be level. If fixing is required, the infill can be lifted at an edge to allow a screw fix, after which the infill can be replaced. Pressure sensitive adhesive will not require re-application. Optionally, velcro strips may be used to hold mat in position for easy removal for off-site cleaning & replacement.

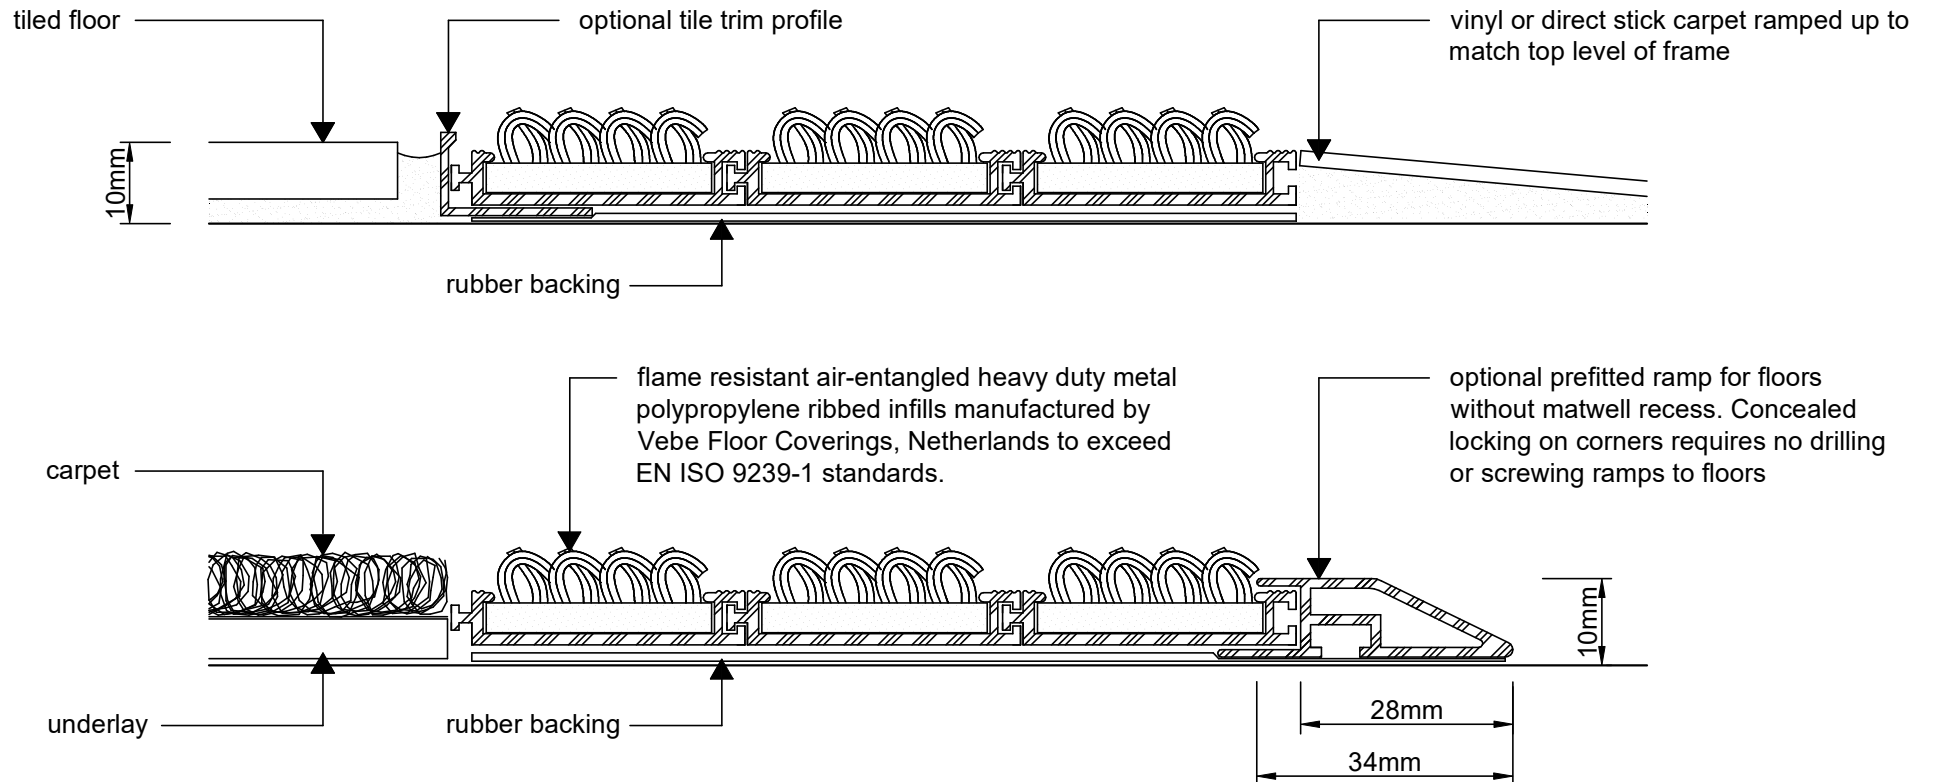

## SPECIFICATION:

Entrance matting shall be ALUMAT 10 I with selected loop pile infill.

Infill colour shall be \_\_\_\_\_.

Ramping option on one or more sides (specify) \_\_\_\_\_.

Matting must be installed on a smooth level base surface to increase mat life and performance.

Aluminium - Exterior grade 6463T5 alloy  
aluminium with 15 micron anodising